



MACHINE OILS

ADDINOL LUBE OIL D 75, D 120

PRODUCT DESCRIPTION

ADDINOL Lube oils D 75 and D 120 are high-grade, ageing resistant mineral oils with outstanding lubricating properties.

SPECIFICATIONS / APPROVALS

According DIN 51501:
Lube Oil D 75: L-AN 68
Lube Oil D 120: L-AN 150

APPLICATION

- Excellent suitability for the lubrication of axle bearings of rail vehicles and signal installations
- Selection depends on requirements of lubrication point (number of revolutions, load, geometry of bearing)

DELIVERY


Delivery preferable in drums and 20 l cans.

CHARACTERISTICS

- High viscosity index
- Good ageing resistance and corrosion protection
- High thermal stability

ADVANTAGES AND BENEFITS

- Good viscosity-temperature behaviour
- Very good cold-flow properties
- Long oil service life
- Low tendency to form deposits and residues

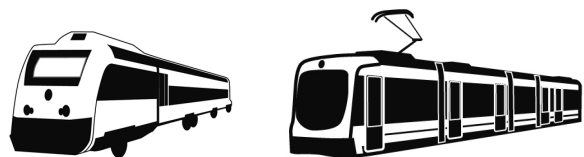



ADDINOL LUBE OIL D 75, D 120

SPECIFICATIONS AND TYPICAL PARAMETERS

Feature	Test condition / unit		Lube Oil D 75	Lube Oil D 120	Method acc. to
Density	at 15°C	kg/m ³	861	882	DIN 51757
Viscosity	at 40°C	mm ² /s	70	150	ASTM D 7042
Flash point	COC	°C min.	264	278	DIN EN ISO 2592
Pour point		°C max.	-30	-22	ASTM D 7346
Content of water		%	< 0.1		DIN ISO 3733

ADDINOL - The Experts for High-Performance Lubricants

We at ADDINOL develop and produce more than 600 high-performance lubricants of the new generation. Among these are automotive lubricants for highest demands and pioneering developments for industrial applications. Our customers all over the world benefit from the high and stable quality of our ADDINOL high-performance lubricants, our know-how and the individual customer advisory service of our competent experts. Our company has world wide activities. ADDINOL high-performance lubricants are distributed by more than 70 international partners.

The data given in this product sheet represent our current level of knowledge and experience. Due to the various specific application they do, however, not discharge the user from his own examination. The information provided herein may not be used to derive a legally binding warranty of specific properties or the suitability for a certain purpose of application. Detailed security-concerning and toxicological data as well as security instructions for each product can be taken from the corresponding Material Safety Data Sheets (MSDS). High-performance lubricants from ADDINOL are under continuous development. Therefore, ADDINOL Lube Oil GmbH keeps the right to change technical data in this product data sheet without notification. In case of doubt, please do not hesitate to contact our customers' advisory service.